



GE INDUSTRIAL MOTORS
a **WOLONG** company

XSDUltra[®]661

Low Voltage Induction Motor

Extra Severe Duty NEMA Premium Efficient

184-365 Frame, 5-75 HP

460V, 60 Hz

3 Phase



All heat exchanger motors are not built the same.



Reliability is built in.

Purchasing dependable electric motors is an investment in the reliability of your operations. And system reliability means serious money to your bottom line.

We've engineered motors to address all of the top factors that can shorten motor life:

Bearings

Heat
Stress, Load,
Fatigue
Vibration
Misalignment
Contamination
Lubrication
Electrical discharge

Windings

Heat
Inverters
Voltage problems
Load
Contamination

Key Features

XSD Ultra 661 motors adhere to API 661 requirements. Each motor also comes with its own test report demonstrating performance compliant with the IEEE 841-2009 specification.

Five year warranty (60/66 months) is standard. This comprehensive warranty program covers both mechanical and NEMA Premium efficiency performance.

ISO 1940 Grade 1.0 Precision Plus balance to 0.04 in/sec results in smooth, reliable operation and long bearing life.

Built for a long 130,000 hour L10 direct connected and 26,280 hour L10 belted bearing life without life adjusting factors.

Non-sparking corrosion resistant fan is quiet and energy efficient.

Four point cast-in lifting lugs for easy and safe mounting.

Centered stator core/frame design enables the conversion to F2 mounting.

Permanently labeled, non-wicking Class H leads make connections and installation easy.

Lead gasket and conduit box cover gasket prevent moisture and contaminants from entering motor.

Grounding terminal in conduit box adds to safety during installation and service.


Complete Test per MG1 Part 12 IEEE Standard 112, Test Method B on 2% of all production. Verification of compliance and routine test report supplied with every XSD Ultra motor.

Stock XSD Ultra motors can be UL listed, CSA listed, or GE self certified for Division 2 locations or modified to meet ATEX Zone 2 or CE requirements.



GEGARD™ Insulation offers added protection.

Our Class H GEGARD insulation system is designed to excel in variable frequency drive applications where lesser designs often short circuit and cause overcurrent trips.

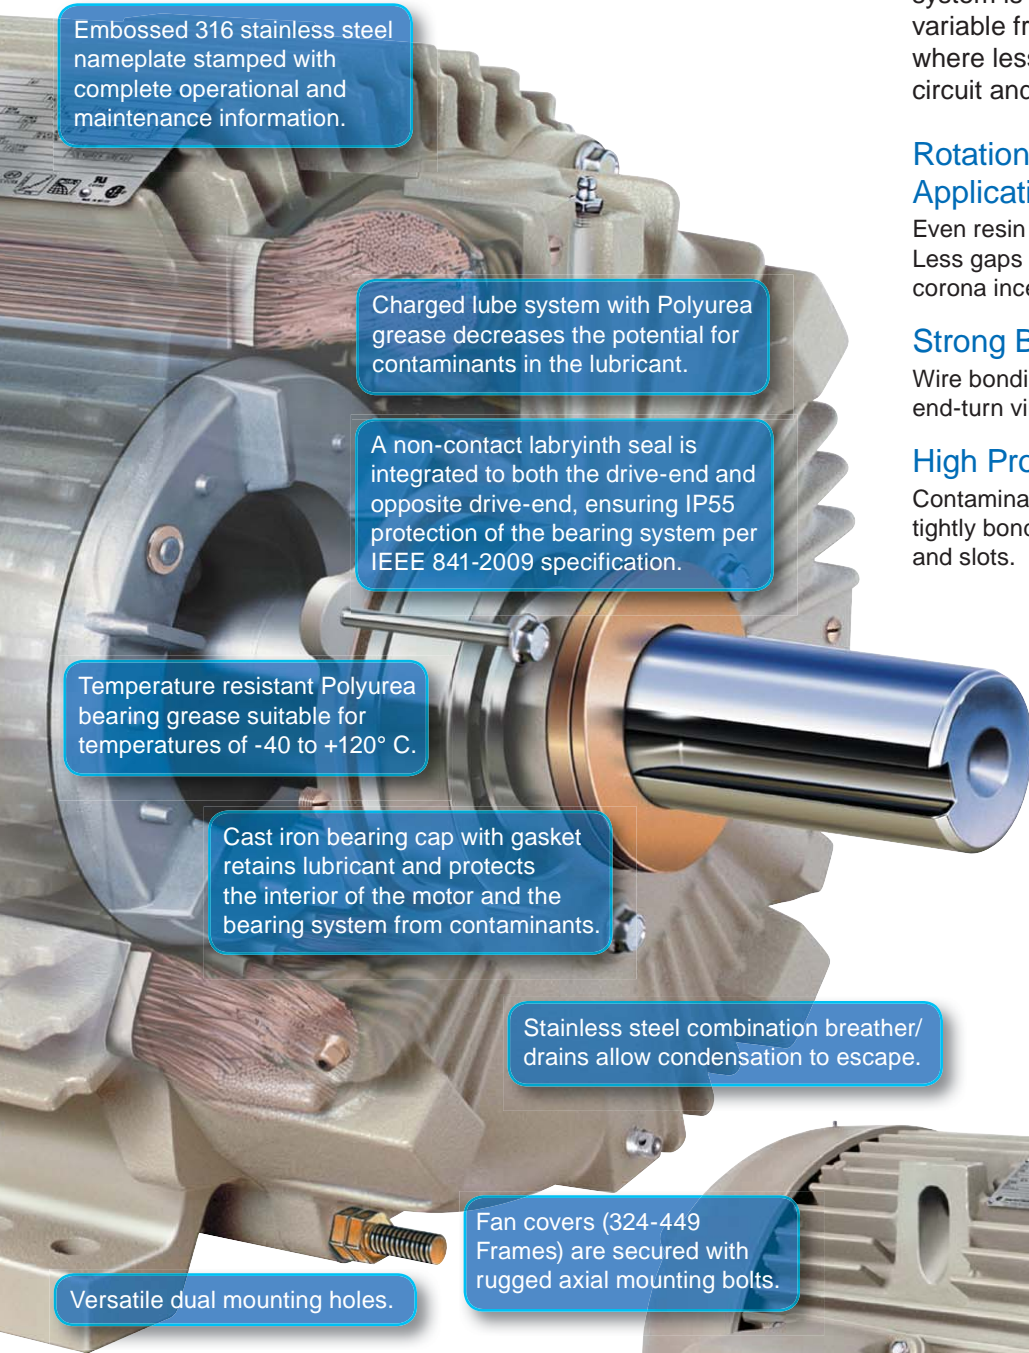

Embossed 316 stainless steel nameplate stamped with complete operational and maintenance information.

Charged lube system with Polyurea grease decreases the potential for contaminants in the lubricant.

A non-contact labyrinth seal is integrated to both the drive-end and opposite drive-end, ensuring IP55 protection of the bearing system per IEEE 841-2009 specification.


Temperature resistant Polyurea bearing grease suitable for temperatures of -40 to +120° C.

Cast iron bearing cap with gasket retains lubricant and protects the interior of the motor and the bearing system from contaminants.

Stainless steel combination breather/drains allow condensation to escape.

Fan covers (324-449 Frames) are secured with rugged axial mounting bolts.

Versatile dual mounting holes.

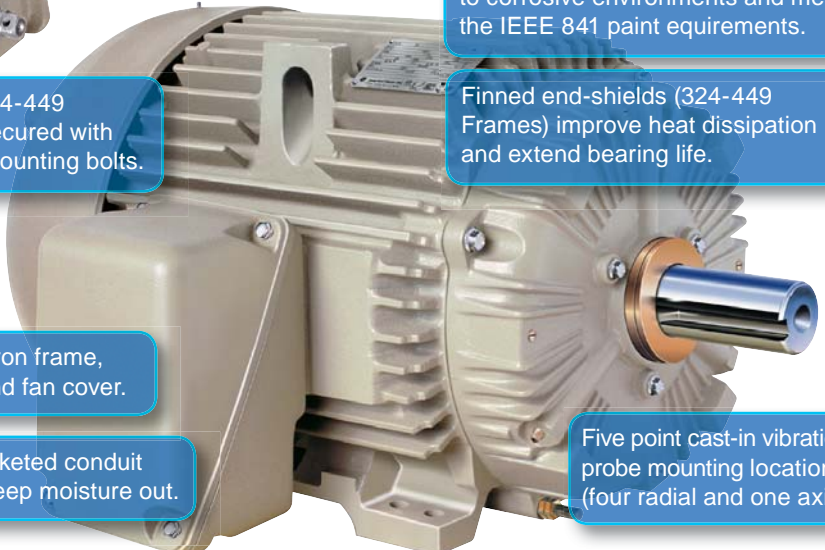

Corrosion resistant and rugged SAE Grade 5 hardware.

Epoxyester paint system stands up to corrosive environments and meets the IEEE 841 paint requirements.

Finned end-shields (324-449 Frames) improve heat dissipation and extend bearing life.

Rugged cast iron frame, conduit box and fan cover.

Oversized gasketed conduit box helps to keep moisture out.

Five point cast-in vibration probe mounting locations (four radial and one axial).

Rotational Varnish Application


Even resin coverage. Less gaps (helps prevent corona inception damage).

Strong Bond

Wire bonding guards against end-turn vibration.

High Protection


Contaminants can't penetrate tightly bonded windings and slots.

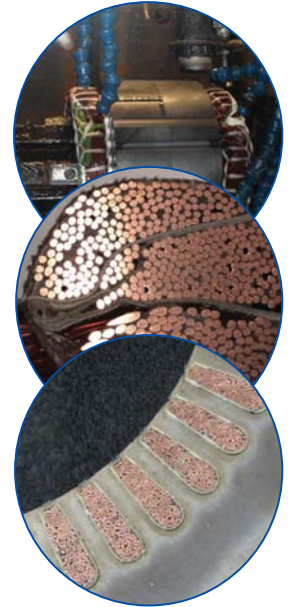

Discover. Quote. Purchase.

Website

The latest information on custom and standard rotating machines.

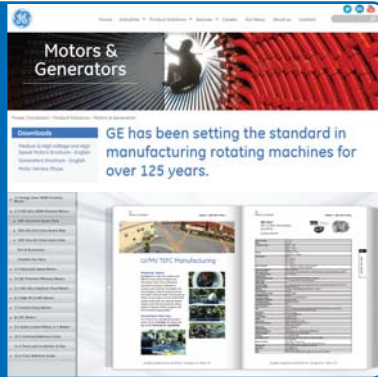

e-Catalog

GE motors on your computer. Auto-update online. Can be viewed offline.



PC Store

Find a distributor. Download data packs. Access support library.



Manufacturing

Monterrey, Mexico
Employs over 500 people.
ISO9000-2008 facility
YouTube Virtual Tour



"GE Motors"



"GE Motor Store"



"Monterrey
AC Capabilities"



GE INDUSTRIAL MOTORS
a WOLONG company

www.gemotors.com

XSD Ultra, GEGARD 2400, and the Six Star Bearing System are trademarks of Wolong Electric America LLC. NEMA Premium is a trademark of NEMA.
©2018, Wolong Electric America LLC. All rights reserved.

GEA18868-EN (11/2018)